



RACCORDO TERMINALE END FITTING

Art.1879

Descrizione / Description

Raccordo terminale con attacco per connessioni 3/4"x18 (Eurocono), 1/2"x15 oppure 1/2"x16. Disponibile in ottone CW617N o in ottone anti-dezincificante CW602N.

End fitting for 3/4"x18 (Eurocono), 1/2"x15 or 1/2"x16 connections.

Available made of CW617N brass or decinification resistant brass CW602N.




CODICE/Code	SIZE	Material
1440309	1/2"x15	CW617N
1440063	1/2"x16	CW617N
1440071	3/4"x18 (Eurocono)	CW617N
1440210	3/4"x18 (Eurocono)	CW602N

Caratteristiche Tecniche

Temperatura max di esercizio: 110°C
Pressione max in ingresso: 10 bar
Filettature: Femmina ISO 228

Technical Features

Maximum temperature: 110°C
Maximum inlet pressure: 10 bar
Threads: Female ISO 228

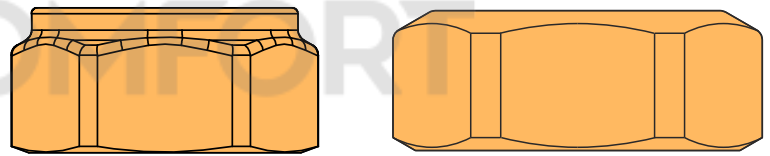


1/2"x15-1/2"x16



3/4"x18 (Eurocono)

Certificazioni Certifications

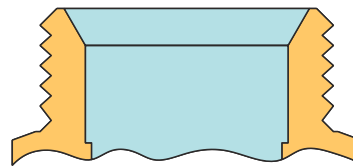

Descrizione	Materiale	Trattamento	Description	Material	Treatment
Corpo	Ottone CW617N - EN12164	-	Body	CW617N-EN12164 brass	-
	Ottone CW602N - EN12164	-		CW602N-EN12164 brass	-
Dado	Ottone CW617N - EN12165	-	Nut	CW617N-EN12164 brass	-
	Ottone CW602N - EN12165	-		CW602N-EN12164 brass	-
O-ring	Gomma etilele-propilene EPDM	-	O-ring	Ethylene-propylene rubber EPDM	-
Guarnizione	Fasit 202	-	Flat washer	Fasit 202	-

TIEMME Raccorderie S.p.A.
Via Cavallera 6/A (Loc. Barco) - 25045 Castegnato (Bs) - Italy
Tel +39 030 2142211 R.A. - Fax +39 030 2142206
info@tiemme.com - www.tiemme.com

TIEMME Raccorderie S.p.A. si riserva di apportare modifiche in qualsiasi momento senza preavviso. È vietata qualsiasi forma di riproduzione, se non autorizzata.
TIEMME Raccorderie S.p.A.reserves the right to modify contents in any time without prior advise. Is forbidden any reproduction unless under TIEMME authorization